


(1) Application No. 8707743
 (2) Date of filing 24 Apr 1987
 (3) Priority date
 (4) Applicant
 (5) Inventors
 (6) Agents and/or Address for Service



Int. Cl.⁴
 G07F 11/00 A61M 11/00
 (2) Domestic classification (Edition 8)
 G07F 11/00
 A61M 11/00
 (3) Documents cited
 (4) Field of search
 (5) Abstract
 (6) Indicated ICS specifications from IPC sub-class G07F
 A61M

6.7) Indicating device

6.7) A device indicates the number of doses dispensed from an aerosol container 2, (102) having an outlet valve member 4, (104) movable relative to the body of the container to dispense its contents in measured doses. Relative movements between the aerosol container body and the outlet member are detected by a ratchet wheel 14, (114) and ratchet driving member 11a, (111) which move with the body and outlet member respectively or vice versa. The ratchet wheel may be turned drive an indicating member in the form of a linear rack 20, (119, 120) or rotatable wheel (116). The linear rack may be driven by a spur wheel 15a (115a) or a single start worm (11b, Figs. 3 & 4) which engages a row of projections on the linear rack. Indication may be by numbers or colours and an indication may be given when the device is empty.

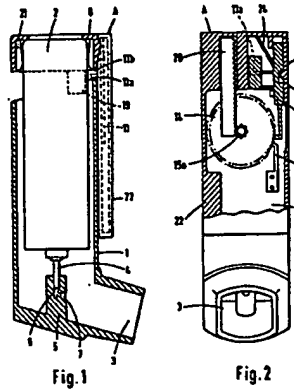

GB 2 191 032 A

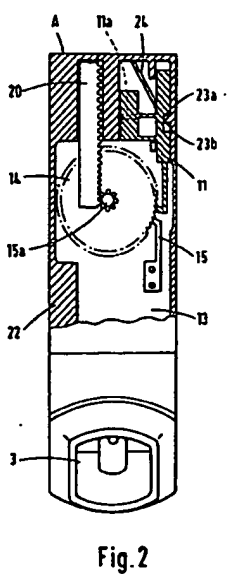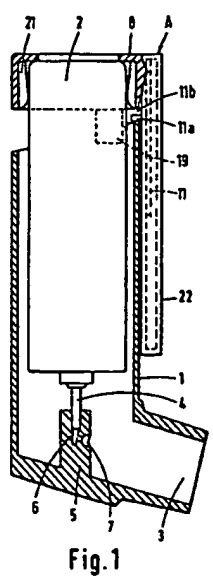

The drawings, although they may have been intended and the prior art represented to them show a form that cannot copy.

2/5




Fig. 2a

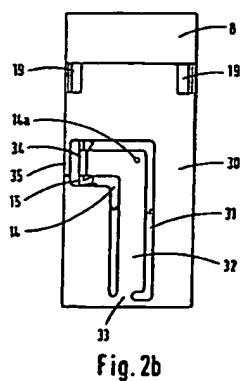


Fig. 2b

3/5

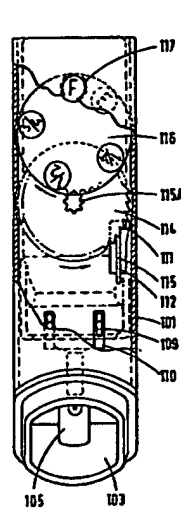


Fig. 3

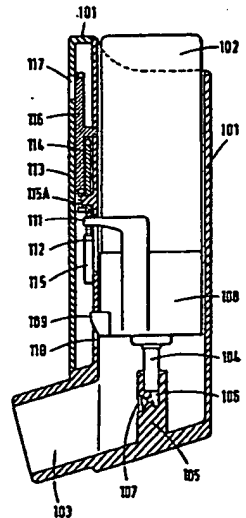


Fig. 4

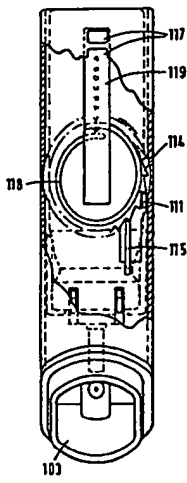


Fig. 5

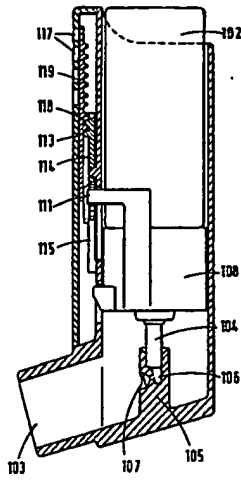


Fig. 6




Fig. 7

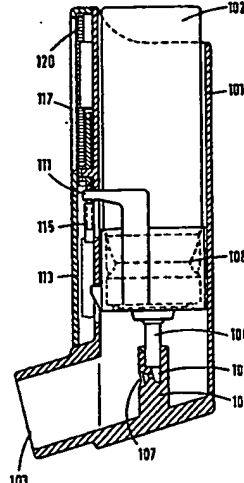


Fig. 8

1 GB 2191032A 1

SPECIFICATION

Indicating device

6 The present invention relates to a device for indicating the number of doses dispensed from an aerosol container and also, to aerosol devices, for example, inhalation devices by which medicaments contained in an aerosol may be administered to a patient.

10 It is well known to treat patients with medicaments contained in an aerosol and are administered to a patient by means of an inhalation device comprising a tubular housing or sleeve in which the aerosol container is located and an outlet tube leading out of the tubular housing.

15 The aerosol containers used in such inhalation devices have an outlet valve member at one end which can be opened either by depressing the valve member while the container is held stationary or by depressing the container while the valve member is held stationary.

20 In the use of such devices, the aerosol container is placed in the tubular housing with the outlet valve member of the container communicating via a support with the outlet tube for example, a nozzle or mouthpiece. When used for dispensing medicaments, for example in bronchodilation therapy, the housing is then held by the patient in a more or less upright condition and the mouthpiece or nozzle of the inhalation device is placed in the mouth or nose of the patient. The aerosol container is pressed towards the support to dispense a dose of medicament from the container which is then inhaled by the patient.

25 A disadvantage arising from use of such known devices is that the patient cannot determine the amount of medicament in the aerosol container at any given time. In an extreme case this could mean that the patient, possibly suffering from severe bronchospasm and needing a dose of medicament, will find that the aerosol container will not dispense a dose because its contents have already been exhausted.

30 An object of the present invention is to provide means of overcoming this disadvantage. Accordingly, the present invention provides a device for indicating the number of doses dispensed from an aerosol container having a body and an outlet member movable relative to the body to depress its contents in measured doses and device comprising movement detection means responsive to relative movement between the body and the outlet member, and indicating means responsive to the movement detection means so that the indicator means is indicative of the number of movements of the body relative to the outlet member and, therefore, of the quantity of the contents of the container remaining therein or

which have been discharged therefrom.

The device of the present invention is preferably adapted for use in connection with the medical inhalation device.

35 In one preferred embodiment, an actuator member is provided which comprises a ring-form member for engaging to the body of the aerosol container. A further member is provided which during at least a portion of the movement of the actuator member, is held stationary with respect to the outlet member. In a preferred embodiment, this further member is held stationary by abutment with a housing in which the aerosol container is received and in which the outlet member of the aerosol container is supported during relative movement of the container body.

40 The device preferably comprises a ratchet wheel which is caused to rotate, by relative movement between the container body and the container housing through a predetermined angle. This wheel may have teeth arranged to indicate the number of relative movements made between the aerosol container and outlet member but is preferably adapted to drive, for example, an indicator rack or ratchet wheel having such advantage employing a suitable stop-down gear ratio. This latter arrangement permits the number of doses indicated to exceed many times the number of such on the ratchet wheel and, hence the production of a compact device.

45 According to a further aspect of the present invention there is provided an aerosol dispensing device comprising a housing in which an aerosol container can be located, an outlet leading from the housing and a support in the housing arranged to receive an outlet member of the aerosol container and having a passage through which the contents of the aerosol container may pass to the outlet, the aerosol dispensing device being provided with a dose indicating device according to the invention.

50 Embodiments of the present invention will now be described with reference to the accompanying drawings in which:

55 Figure 1 is a side view, partially in section, of a first embodiment of the indicating device of the present invention mounted in a medical inhalation device;

60 Figure 2 is a front view of the arrangement shown in Figure 1 in which the indicating device is shown in section;

65 Figure 2a shows a part of modified embodiment from one aspect;

70 Figure 2b shows a view from the opposite side to Figure 2 of a feature applicable both to the embodiment of Figures 1 and 2, and the modified embodiment of Figure 2a;

75 Figure 3 is a front view of a further embodiment of the invention, part of a first view of the device being broken away;

80 Figure 4 is a sectional view of the device of Figure 2;

2 GB 2191032A 2

Figures 5 and 6 are similar views illustrating one modification of the device illustrated in Figures 3 and 4; and

Figures 7 and 8 are similar views of another modification.

The invention device shown in Figures 1 and 2 comprises a tubular housing 1 in which an aerosol container 2 can be located. The housing is open at one end (which will hereafter be considered to be the top of the device for convenience of description) and is closed at the other. An outlet 3 leads laterally from the closed end of the housing 1. In the embodiment illustrated, the outlet 3 is in the form of a mouthpiece formed for insertion into the mouth of the patient, but it may if desired be designed as a nozzle for insertion into the patient's nostril.

10 The aerosol container 2 has an outlet valve member 4 at one end. This valve member can be depressed to release a measured dose from the aerosol container or, alternatively, the valve member 4 can be fixed and the main body of the container can be moved relative to the valve member to release the dose.

15 As shown clearly in Figure 1, the aerosol container 2 is located in the housing 1 so that one end protrudes from its open top. Spear ribs (not shown) may be provided inside the housing to hold the external surface of the container 2 spread from the internal surface of the housing 1. A support 5 is provided at the lower end of the housing 1 and has a passage 6 in which the valve member 4 of the aerosol container 2 can be located and supported. A second passage 7 is provided in the support 5 and is directed towards the interior of the outlet 3. Thus when the parts are in the positions shown in Figure 1 and 2 the protruding portion of the aerosol container 2 can be depressed to move the container relative to the valve member 4 to open the valve and a dose of medicament contained in the aerosol will be discharged through the passage 7 and into the outlet 3 from which it can be inhaled by a patient. One dose will be released from the aerosol container each time it is fully depressed.

20 Figure 1 and 2 also show an embodiment of the dose indicating device of the present invention. This device 8 comprises an actuator member in the form of a ring-shaped cap member 8 which is removably located on the end of the protruding portion of the body of the aerosol container 2. The cap member 8 is retained on the body of the aerosol container 2 by means of longitudinal ribs 21 on its internal surface so that once it is on the body it cannot be removed too easily. The top of the cap 8 acts the end of the body of the container 2 and moves with the body throughout its displacement towards and away from the support 5. A pair of symmetrically placed spacing members 19, of which one can be

seen in Figure 1, extend from the lip of the cap member 8 into the housing 1 and slide against the internal wall of the housing so as to guide the movement of the aerosol container body thereto.

25 Attached to the side of the cap member 8 and movable therewith is a housing 22 which defines an indicator compartment 13. This housing 22 extends from the cap member 8 along the external surface of the tubular housing 1. The length of this indicator housing 22 is such that when mounted on the tubular housing 1 it does not abut the outlet 3 as it moves downwards with the container body.

30 A driving arm 11 is slidably retained within the housing 22 and is guided for movement between two limit positions defined by stop surfaces 23a and 23b. The driving arm 11 supports a projection 11a which extends through and is movable within a slot 11b in the wall of the indicator housing 22 mounted adjacent the tubular housing 1. In this embodiment projection 11a rests on the top edge 1c of the wall of the tubular housing 1.

35 The driving arm 11 engages a ratchet wheel 14 which is mounted to the wall of the indicator housing 22. This ratchet wheel cooperates with a ratchet pawl 15. Whenever the body of the aerosol container 2 is depressed to open the valve member 4, the ratchet wheel 14 moves downwards with the cap member 8 while the driving arm 11 remains stationary with respect to the support 5 by virtue of the abutment of projection 11a with the wall of the tubular housing 1. In view of the engagement of the driving arm 11 with the ratchet wheel 14, this relative linear movement between these two elements results in rotation of the ratchet wheel 14 in a clockwise direction (as viewed in Figure 2) through the angle subtended by a ratchet wheel tooth.

40 A gear wheel 13a which is rotatable with the ratchet wheel 14 engages a toothed indicator rack 20. The gear ratio between the rack and gear wheel is such that the indicator rack moves through one "step" for a predetermined number of ratchet wheel "teeth" and, hence, doses dispensed. The form of the housing 22 has a window (not shown) through which a portion of the indicator rack 20 is visible. This indicator rack carries suitable markings which are displayed through the window when the given marking registers with this window. Any suitable markings may be employed, though preferably not letters, numbers or like characters which require to be read. For example, the rack can be marked with different colours of different portions so that for example when a red portion is displayed through the window, the patient will know that a new aerosol container must be obtained. In other alternatives however, the indicator rack may be marked with numbers to indicate the proportion of the contents still remaining or the number of doses dispensed

from or remaining in the aerosol container, in a convenient arrangement, the markings on the indicator rack indicate that the aerosol container is empty after a predetermined number of doses for example 200 have been dispensed, the predetermined number being less than the number of doses with which the container has been charged, say 220, so as to allow for a margin of error.

With displacement of the cap member 8 and housing 22 towards the support 5, a resilient member 24 extended to or part of driving arm 11, extends obliquely between the driving arm 11 and the top wall of the housing 22 in place of and in compression of the cap member 8. Once the pressure applied to the cap member 8 has been released, the device A returns to the position illustrated in Figures 1 and 2. The force exerted by the resilient member 24 pushes the driving arm 11 downwards within the housing 22 so as to engage a subsequent tooth of the ratchet wheel 14.

The device illustrated in Figures 1 and 2 may be modified by replacing the indicator rack 20 by a toothed indicator wheel which is engaged by the spur wheel 15A. Thus, on rotation of the ratchet wheel 14 by the spur wheel 15A drives the indicator wheel.

In a further modification of the device illustrated in Figures 1 and 2, the spur wheel 15A is replaced on the ratchet wheel 14 by a single start worm and the toothed indicator rack 20 is replaced by an indicator rack having a row of projections engageable by this single start worm. Thus, in this case, rotation of the ratchet wheel 14 rotates the single start worm which in turn drives the indicator rack.

Figure 2a shows a modification of part of what is shown in Figure 2, the resilient member 24 being replaced by a compression spring 24'.

Figure 2b shows a device according to the invention viewed from the opposite side to Figure 2. The view shows a plate 30 which forms a cover for the mechanism visible in Figure 2b. A slot 31 is formed in the plate 30 to define a tongue 32, having the shape of an inverted L, connected to the rear of the cover only by a narrow bridge 33. An up-standing leg 34 is formed on the base of the L and a similar leg 35 is formed on the remainder of the cover for the side of the slot in the leg 34. The material, e.g. plastics material, of which the plate is formed is sufficiently resilient that a user can urge the legs towards one another for the purpose of gripping them between a thumb and finger in which process flexing about the bridge 33 occurs. The slot 14a on which the wheel 14 rotates is mounted in the tongue 32, so that urging the legs 34 and 35 together moves the wheel out of engagement with the rack 20. This enables the rack 20 to slide down to the end position in which it represents a value of zero doses having been dispensed, in this

way the counter is reset to zero. Thus, when one container has been dispensed the counter can be removed, reset to zero, and mounted on a full container, and in this way can be reused many times. The housing 101 is open at one end which will hereinafter be considered the top of the device for convenience of description. The housing 101 is closed at the other end. An outlet 103 leads laterally from near the closed end of the housing 101, in the form of a multipiece bracket for insertion into the mouth of a patient, but it may, if desired, be provided as a handle for insertion into the nostril of a patient.

The aerosol container 102 has an outer valve member 104 at one end. This valve member can be depressed to release a dose from the aerosol container or, alternatively, the valve member 104 can be fixed and the main body of the container can be moved relatively to the valve member 104 to release a dose. The aerosol container 102 is located in the housing 101 so that one end protrudes from the open top of the housing as shown clearly in Figure 4. Space (the not shown ring) is provided inside the housing to hold the external surface of the container spaced from the internal surface of the housing. A support or stem block 105 is provided in the lower end of the housing 101 and has a passage 106 in which the valve member 104 of the aerosol container 102 can be located and supported. A second passage 107 is provided in the support 105 and is directed towards the interior of the outlet 103. Thus when the parts are in positions shown in Figures 3 and 4 the protruding portion of the aerosol container 102 can be depressed to move the aerosol container 102 relatively to the valve member 104 so that the valve will be opened and a dose of medication contained in the aerosol will be discharged through the passage 107 into the outlet 103 from which it can be inhaled by the patient. One dose will be released from the aerosol container each time it is fully depressed.

An actuator and container retainer member in the form of a ring 108 is guided for sliding movement in the housing 101. Locating lugs 109 protrude from the ring 108 and slide in slots 110 in the wall of the housing. The aerosol container 102 is fixed in the ring 108 in such a way that once it is fitted therein it cannot be removed therefrom and also so that the ring will move with the container 102 when it is depressed to open the outlet valve of the aerosol container. The fact that the aerosol container cannot be removed once it has been fitted prevents intentional abuse of the product by replacement with an alternative product which may be detrimental or even dangerous to the wellbeing of a patient and contrary to medical instructions.

A driving arm 111 extends from the ring

108 through a slot 112 in the wall of the housing 101 into an indicator compartment 113. The driving arm 111 engages a ratchet wheel 114 in the indicator compartment. The ratchet wheel co-operates with a ratchet pawl 115. When the aerosol container 102 is depressed, the driving arm 111 moves downwards and forwards in the centre of the ratchet wheel 114, so engaging the next adjacent ratchet tooth. When the aerosol container 102 is released, the driving arm 111 moves upwards causing the ratchet wheel 114 to rotate the distance of one tooth. Rotatable with the ratchet wheel 114 is a spur gear 115A which engages a toothed indicator wheel 116. Thus, the indicator wheel 116 rotates one step for each dose dispensed by depression of the body of the aerosol container 112. The front of the indicator housing 113 has a window 117 through which a portion of the indicator wheel 116 is indicated. This indicator wheel can be given suitable markings which are displayed through the window when the given markings register with the window. Thus, in the embodiment illustrated the indicator wheel has markings "1/4", "1/2", "3/4", "1", "2", "3", "4", "5", "6", "7", "8", "9", "10", "11", "12", "13", "14", "15", "16", "17", "18", "19", "20", "21", "22", "23", "24", "25", "26", "27", "28", "29", "30", "31", "32", "33", "34", "35", "36", "37", "38", "39", "40", "41", "42", "43", "44", "45", "46", "47", "48", "49", "50", "51", "52", "53", "54", "55", "56", "57", "58", "59", "60", "61", "62", "63", "64", "65", "66", "67", "68", "69", "70", "71", "72", "73", "74", "75", "76", "77", "78", "79", "80", "81", "82", "83", "84", "85", "86", "87", "88", "89", "90", "91", "92", "93", "94", "95", "96", "97", "98", "99", "100", "101", "102", "103", "104", "105", "106", "107", "108", "109", "110", "111", "112", "113", "114", "115", "116", "117", "118", "119", "120", "121", "122", "123", "124", "125", "126", "127", "128", "129", "130", "131", "132", "133", "134", "135", "136", "137", "138", "139", "140", "141", "142", "143", "144", "145", "146", "147", "148", "149", "150", "151", "152", "153", "154", "155", "156", "157", "158", "159", "160", "161", "162", "163", "164", "165", "166", "167", "168", "169", "170", "171", "172", "173", "174", "175", "176", "177", "178", "179", "180", "181", "182", "183", "184", "185", "186", "187", "188", "189", "190", "191", "192", "193", "194", "195", "196", "197", "198", "199", "200", "201", "202", "203", "204", "205", "206", "207", "208", "209", "210", "211", "212", "213", "214", "215", "216", "217", "218", "219", "220", "221", "222", "223", "224", "225", "226", "227", "228", "229", "230", "231", "232", "233", "234", "235", "236", "237", "238", "239", "240", "241", "242", "243", "244", "245", "246", "247", "248", "249", "250", "251", "252", "253", "254", "255", "256", "257", "258", "259", "260", "261", "262", "263", "264", "265", "266", "267", "268", "269", "270", "271", "272", "273", "274", "275", "276", "277", "278", "279", "280", "281", "282", "283", "284", "285", "286", "287", "288", "289", "290", "291", "292", "293", "294", "295", "296", "297", "298", "299", "300", "301", "302", "303", "304", "305", "306", "307", "308", "309", "310", "311", "312", "313", "314", "315", "316", "317", "318", "319", "320", "321", "322", "323", "324", "325", "326", "327", "328", "329", "330", "331", "332", "333", "334", "335", "336", "337", "338", "339", "340", "341", "342", "343", "344", "345", "346", "347", "348", "349", "350", "351", "352", "353", "354", "355", "356", "357", "358", "359", "360", "361", "362", "363", "364", "365", "366", "367", "368", "369", "370", "371", "372", "373", "374", "375", "376", "377", "378", "379", "380", "381", "382", "383", "384", "385", "386", "387", "388", "389", "390", "391", "392", "393", "394", "395", "396", "397", "398", "399", "400", "401", "402", "403", "404", "405", "406", "407", "408", "409", "410", "411", "412", "413", "414", "415", "416", "417", "418", "419", "420", "421", "422", "423", "424", "425", "426", "427", "428", "429", "430", "431", "432", "433", "434", "435", "436", "437", "438", "439", "440", "441", "442", "443", "444", "445", "446", "447", "448", "449", "450", "451", "452", "453", "454", "455", "456", "457", "458", "459", "460", "461", "462", "463", "464", "465", "466", "467", "468", "469", "470", "471", "472", "473", "474", "475", "476", "477", "478", "479", "480", "481", "482", "483", "484", "485", "486", "487", "488", "489", "490", "491", "492", "493", "494", "495", "496", "497", "498", "499", "500", "501", "502", "503", "504", "505", "506", "507", "508", "509", "510", "511", "512", "513", "514", "515", "516", "517", "518", "519", "520", "521", "522", "523", "524", "525", "526", "527", "528", "529", "530", "531", "532", "533", "534", "535", "536", "537", "538", "539", "540", "541", "542", "543", "544", "545", "546", "547", "548", "549", "550", "551", "552", "553", "554", "555", "556", "557", "558", "559", "560", "561", "562", "563", "564", "565", "566", "567", "568", "569", "570", "571", "572", "573", "574", "575", "576", "577", "578", "579", "580", "581", "582", "583", "584", "585", "586", "587", "588", "589", "590", "591", "592", "593", "594", "595", "596", "597", "598", "599", "600", "601", "602", "603", "604", "605", "606", "607", "608", "609", "610", "611", "612", "613", "614", "615", "616", "617", "618", "619", "620", "621", "622", "623", "624", "625", "626", "627", "628", "629", "630", "631", "632", "633", "634", "635", "636", "637", "638", "639", "640", "641", "642", "643", "644", "645", "646", "647", "648", "649", "650", "651", "652", "653", "654", "655", "656", "657", "658", "659", "660", "661", "662", "663", "664", "665", "666", "667", "668", "669", "670", "671", "672", "673", "674", "675", "676", "677", "678", "679", "680", "681", "682", "683", "684", "685", "686", "687", "688", "689", "690", "691", "692", "693", "694", "695", "696", "697", "698", "699", "700", "701", "702", "703", "704", "705", "706", "707", "708", "709", "710", "711", "712", "713", "714", "715", "716", "717", "718", "719", "720", "721", "722", "723", "724", "725", "726", "727", "728", "729", "730", "731", "732", "733", "734", "735", "736", "737", "738", "739", "740", "741", "742", "743", "744", "745", "746", "747", "748", "749", "750", "751", "752", "753", "754", "755", "756", "757", "758", "759", "760", "761", "762", "763", "764", "765", "766", "767", "768", "769", "770", "771", "772", "773", "774", "775", "776", "777", "778", "779", "780", "781", "782", "783", "784", "785", "786", "787", "788", "789", "790", "791", "792", "793", "794", "795", "796", "797", "798", "799", "800", "801", "802", "803", "804", "805", "806", "807", "808", "809", "810", "811", "812", "813", "814", "815", "816", "817", "818", "819", "820", "821", "822", "823", "824", "825", "826", "827", "828", "829", "830", "831", "832", "833", "834", "835", "836", "837", "838", "839", "840", "841", "842", "843", "844", "845", "846", "847", "848", "849", "850", "851", "852", "853", "854", "855", "856", "857", "858", "859", "860", "861", "862", "863", "864", "865", "866", "867", "868", "869", "870", "871", "872", "873", "874", "875", "876", "877", "878", "879", "880", "881", "882", "883", "884", "885", "886", "887", "888", "889", "890", "891", "892", "893", "894", "895", "896", "897", "898", "899", "900", "901", "902", "903", "904", "905", "906", "907", "908", "909", "910", "911", "912", "913", "914", "915", "916", "917", "918", "919", "920", "921", "922", "923", "924", "925", "926", "927", "928", "929", "930", "931", "932", "933", "934", "935", "936", "937", "938", "939", "940", "941", "942", "943", "944", "945", "946", "947", "948", "949", "950", "951", "952", "953", "954", "955", "956", "957", "958", "959", "960", "961", "962", "963", "964", "965", "966", "967", "968", "969", "970", "971", "972", "973", "974", "975", "976", "977", "978", "979", "980", "981", "982", "983", "984", "985", "986", "987", "988", "989", "990", "991", "992", "993", "994", "995", "996", "997", "998", "999", "1000".

of product used or that which is left in the container.

CLAIMS

1. A device for indicating the number of doses dispensed from an aerosol container having a body and an outlet member movable relative to the body to dispense its contents in measured doses, said device comprising a movement detection means responsive to relative movement between the body and the outlet member and indicating means responsive to the movement detection means so that the indicator means is indicative of the number of movements of the body relative to the outlet member and, therefore, of the quantity of the contents of the container remaining therein or which have been discharged therefrom.
2. A device according to Claim 1, wherein the movement detection means comprises a ratchet wheel movable with one of the aerosol container and outlet member, and a ratchet wheel driving member movable with the other of the aerosol container and outlet member and arranged to rotate the ratchet wheel through a predetermined step upon relative movement of the aerosol container and outlet member.
3. A device according to Claim 1 or 2, wherein the indicator means is arranged to move linearly.
4. A device according to Claim 3 wherein the indicator means comprises a toothed rack and the ratchet wheel carries a worm which engages the rack.
5. A device according to Claim 3, wherein the indicator means comprises an indicator rack having a row of projections, and the ratchet wheel carries a worm which engages the row of projections and drives the rack.
6. A device according to Claim 2, wherein the indicating means comprise a rotatable toothed indicating wheel, and the ratchet wheel carries a spur gear which meshes with the indicating wheel and drives it.
7. A device according to Claim 2, wherein the ratchet wheel itself constitutes the indicating means.
8. A device according to any preceding claim, comprising an actuator member adapted to be removably mounted on the body of the aerosol container so as to be displaceable with respect to the outlet member, the actuator member comprising a further member which, during at least a portion of the movement of the actuator member, is held stationary with respect to the outlet member.
9. A device according to Claim 8, wherein the said further member is arranged to be held stationary with respect to the outlet member by attachment with a housing in which the aerosol container is received and in which the outlet member is supported during relative movement of the container body.

10. A device according to Claim 8 or 9, wherein the actuator member comprises a dog-shaped cap adapted to be mounted on an end of the body of the aerosol container.
11. A device according to any one of claims 8 to 10, comprising means for resetting the indicator means to zero.
12. A device according to any preceding claim, wherein the indicating means carries no numbers, letters, or like characters.
13. An aerosol dispensing device comprising a housing in which an aerosol container can be located, an outlet leading from the housing and a support in the housing arranged to receive an outlet member of the aerosol container and having a passage through which the contents of the aerosol container may pass to the outlet, the outlet member being movable relative to the body of the container to dispense its contents in measured doses; and a dose indicating device according to any one of Claims 1 to 7.
14. An aerosol dispensing device according to Claim 13, wherein the dose indicating device comprises an indicator compartment disposed on a wall of the container-receiving housing, the dose indicating device comprising an actuator member mounted on and carried by the body of the aerosol container so as to be displaceable with respect to the outlet member, and hence with respect to the container-receiving housing, the said actuator member carrying an arm which extends into the said indicator compartment to operate the said indicating means.
15. An aerosol dispensing device according to Claim 14, wherein the said actuator member is arranged to be so mounted on the body of the aerosol container that it cannot be removed therefrom.
16. A dose indicating device substantially as herein described with reference to any of the embodiments shown in the accompanying drawings.
17. An aerosol dispensing device provided with a dose indicating device substantially as herein described with reference to any of the embodiments shown in the accompanying drawings.